

## Product Datasheet

# 19-port Gigabit Uplink PoE Switch

(GWS-1016PFD)



## Overview

The GWS-1016PFD is an unmanaged PoE switch. It has 16\*10/100Base-T PoE ports, 2\*10/100/1000Base-T uplink RJ45 ports and 1\*1000M Base-X uplink SFP ports. Port 1-16 can support IEEE802.3af/at PoE standard. Single-port PoE power up to 30W. As a PoE power supply device, it can automatically detect and recognize the power receiving equipment that meets the standard and supply power through the network cable. It can supply power to POE terminal equipment such as wireless AP, webcam, VoIP phone, video access control intercom, etc. through a network cable to meet the network environment that needs a high-density PoE power supply. It is suitable for hotels, campuses, factory quarters, and small and medium-sized enterprises to form an economy efficient network.

Unmanaged mode, plug and play, no configuration, easy to use.

## Feature

### ■ 100Mbps access, Gigabit optical ports uplink

- ◇ Support non-blocking wire-speed forwarding for smoother transmission.
- ◇ Support IEEE 802.3x full-duplex flow control and Backpressure half-duplex flow control.
- ◇ Provide Ethernet ports and Gigabit SFP ports uplink for flexible networking and meets the networking requirements of various scenarios.

### ■ Intelligent PoE power supply

- ◇ 16\*10/100Base-TX RJ45 ports support PoE power to meet the needs of PoE power in various scenarios in the security field.
- ◇ Comply with PoE+ power standard, automatically identify PoE devices for power without damaging non-PoE devices, and the single port max PoE output power is 30W.

### ■ Stable and reliable, easy to use

- ◇ CCC,CE, FCC, RoHS.
- ◇ Plug and play, no configuration, simple and convenient.
- ◇ Low power consumption, galvanized steel casing, no fan.
- ◇ The user-friendly panel can show the device status through the LED indicator of PWR, Link, PoE.
- ◇ Self-developed power supply, high redundancy design, providing a long term and stable PoE power output.

### ■ Innovative function

- ◇ **Long-distance mode (E):** switch to "ON" position (default "OFF"), the port 9 to 16 rate is 10M, and the PoE watchdog function is turned on at the same time to monitor and automatically restart the communication failure PoE port. Using the existing twisted pair can break through the 100 meters transmission limit, and the transmission distance can be up to 250 meters. At the same time, it can solve the problem of poor transmission caused by aging lines.

## Technical Specification


| Model                            | GWS-1016PFD                                                                                                                                             | GWS-1024PFD                                                                                                                                     |
|----------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Interface Characteristics</b> |                                                                                                                                                         |                                                                                                                                                 |
| Fixed Port                       | 16*10/100Base-T PoE ports<br>(Data/Power)<br><br>2*10/100/1000Base-T uplink RJ45<br>ports (Data)<br><br>1*1000Base-X uplink SFP ports<br>(Data)         | 24*10/100Base-T PoE ports<br>(Data/Power)<br><br>2*10/100/1000Base-T uplink RJ45<br>ports (Data)<br><br>1*1000Base-X uplink SFP ports<br>(Data) |
| Ethernet Port                    | Port 1-16/1-24 can support 10/100Base-T(X) and 17-18/25-26 can support 100/1000Base-T(X) automatic detection, full/half-duplex MDI/MDI-X auto-sensing   |                                                                                                                                                 |
| Twisted Pair<br>Transmission     | 10BASE-T: Cat3,4,5 UTP(≤250 meter)<br><br>100BASE-TX: Cat5 or later UTP(≤100 meter)<br><br>1000BASE-T: Cat5e or later UTP(≤100 meter)                   |                                                                                                                                                 |
| Optical Fiber Port               | Gigabit optical fiber port, default no include optical module(optional order single-mode / multi-mode, single fiber / dual fiber optical module. LC/SC) |                                                                                                                                                 |
| Optical Cable/<br>Distance       | Multi-mode: 850nm/ 0-550m<br><br>Single-mode: 1310nm/ 0-40km, 1550nm/ 0-120km                                                                           |                                                                                                                                                 |
| Functional Switch                | <b>E</b> : long-distance function (Default: OFF, Use:ON), After opening, ports 9-16/17-24 support 10M/250m long distance + POE watchdog                 |                                                                                                                                                 |
| <b>Chip Parameter</b>            |                                                                                                                                                         |                                                                                                                                                 |
| Network Protocol                 | IEEE802.3 10BASE-T, IEEE802.3i 10Base-T<br><br>IEEE802.3u 100Base-TX, IEEE802.3ab 1000Base-T,IEEE802.3z<br><br>1000Base-X,IEEE802.3x                    |                                                                                                                                                 |
| Forwarding Mode                  | Store and Forward(Full Wire Speed)                                                                                                                      |                                                                                                                                                 |
| Switching Capacity               | 9.2Gbps (Non-blocking)                                                                                                                                  | 10.8Gbps (Non-blocking)                                                                                                                         |

|                                     |                                                                                              |                                                   |
|-------------------------------------|----------------------------------------------------------------------------------------------|---------------------------------------------------|
| Forwarding Rate@64byte              | 6.84Mpps                                                                                     | 8.04Mpps                                          |
| MAC                                 | 2K                                                                                           | 2K                                                |
| Buffer Memory                       | 2.75M                                                                                        |                                                   |
| Jumbo Frame                         | 9.2K                                                                                         |                                                   |
| LED Indicator                       | Power: PWR (Green), Network: Link (Green), PoE: PoE (Red), Functional switch: EXTEND (Green) |                                                   |
| <b>PoE &amp; Power Supply</b>       |                                                                                              |                                                   |
| PoE Port                            | Port 1 to 16 @ IEEE802.3af/at                                                                | Port 1 to 24 @ IEEE802.3af/at                     |
| Power Supply Pin                    | 1/2(+) 3/6(-)                                                                                |                                                   |
| Max Power Per Port                  | 30W, IEEE802.3af/at                                                                          |                                                   |
| Total PWR / Input Voltage           | 180W/ (AC100-240V)                                                                           | 280W/ (AC100-240V)                                |
| Power Consumption                   | Standby <5W, Full load <180W                                                                 | Standby <8W, Full load <250W                      |
| Power Supply                        | Built-in power supply,<br>AC100~240V 50-60Hz 2.2A                                            | Built-in power supply,<br>AC100~240V 50-60Hz 4.1A |
| <b>Physical Parameter</b>           |                                                                                              |                                                   |
| Operation TEMP / Humidity           | -20~+55°C, 5%~90% RH Non condensing                                                          |                                                   |
| Storage TEMP / Humidity             | -40~+80°C, 5%~95% RH Non condensing                                                          |                                                   |
| Dimension (L*W*H)                   | 350*215*44mm                                                                                 | 350*215*44mm                                      |
| Net /Gross Weight                   | <2.3kg / <2.8kg                                                                              | <2.5kg / <3.0kg                                   |
| Installation                        | Desktop, Rack-mounted                                                                        |                                                   |
| <b>Certification &amp; Warranty</b> |                                                                                              |                                                   |
| Lightning Protection                | Lightning protection: 4KV 8/20us, Protection level: IP30                                     |                                                   |
| Certification                       | CCC, CE mark, commercial, CE/LVD EN62368-1, FCC Part 15 Class B, RoHS                        |                                                   |


Warranty

1 year, lifelong maintenance.

## Dimension

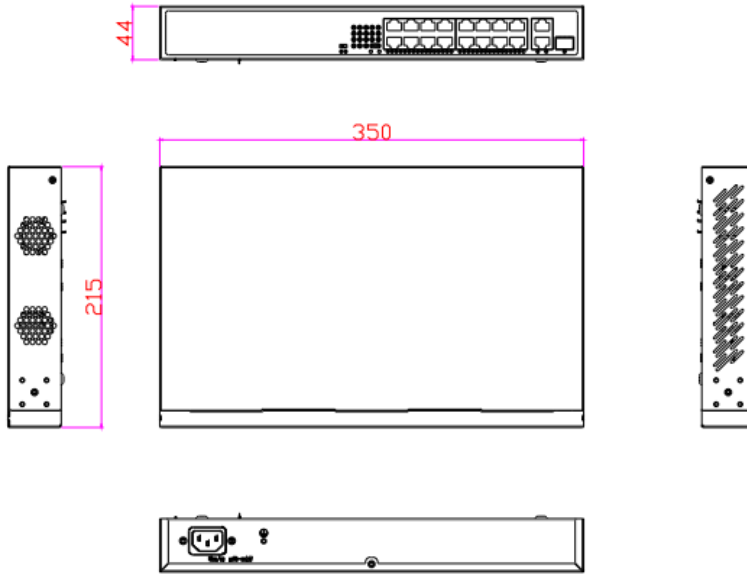

## Application

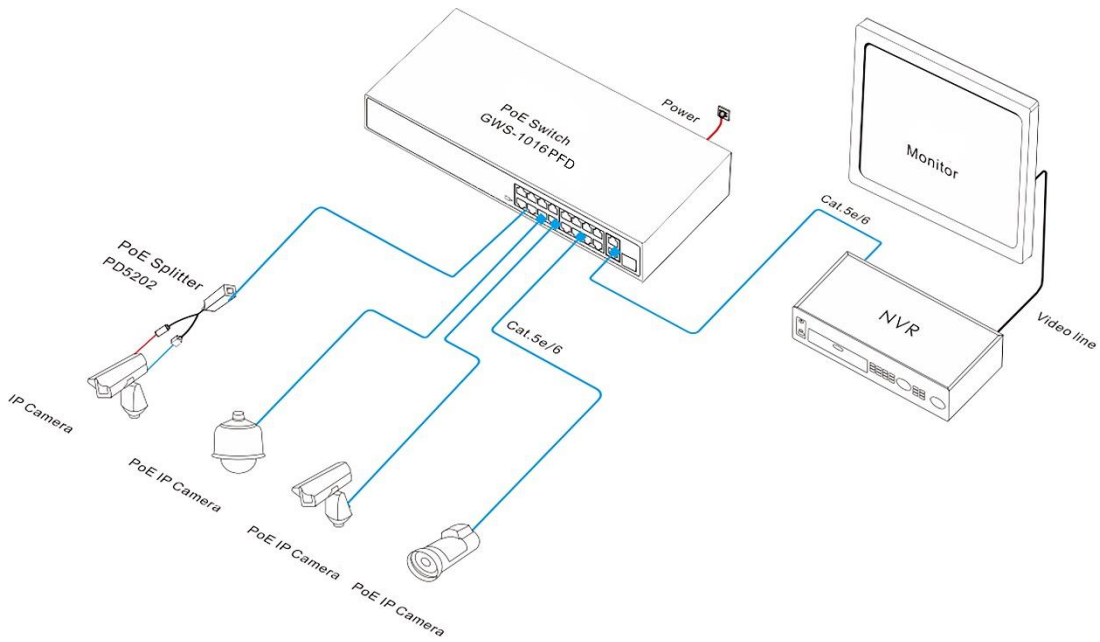

## Ordering Information

| Model       | Description                                                                                                                                                                                                                                                                                                                                                                                          | Power Supply |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|
| GWS-1016PFD | Unmanaged PoE switch with 16*10/100M PoE ports, 2*10/100/1000M Base-T uplink RJ45 ports and 1*1000Base-X uplink SFP ports. Port 1-16 can support IEEE802.3af/at PoE standard. The POE watchdog function is turned on by default(automatically restart PoE to realize network self-healing), switch the functional switch, ports 9-16 rate is 10M/250 meters transmission and built-in power supply.  | 52V/180W     |
| GWS-1024PFD | Unmanaged PoE switch with 24*10/100M PoE ports, 2*10/100/1000M Base-T uplink RJ45 ports and 1*1000Base-X uplink SFP ports. Port 1-24 can support IEEE802.3af/at PoE standard. The POE watchdog function is turned on by default(automatically restart PoE to realize network self-healing), switch the functional switch, ports 17-24 rate is 10M/250 meters transmission and built-in power supply. | 52V/280W     |

## Packing List

|              | CONTENT                           | QTY | UNIT |
|--------------|-----------------------------------|-----|------|
| Packing List | 19-port Gigabit Uplink PoE Switch | 1   | SET  |
|              | AC Power Line                     | 1   | PC   |
|              | User Guide                        | 1   | PC   |
|              | Warranty Card                     | 1   | PC   |

## Contact Us



Tel: 0086-755-33376606

Fax: 0086-755-33376608

WeChat: HZGWS-PoE

Email: [hzgws@hzgws.com](mailto:hzgws@hzgws.com)

Skype: [hzgws@hzgws.com](https://www.skype.com/people/hzgws@hzgws.com)

Website: [www.hzgws.com](http://www.hzgws.com)

Address: Building 3, Phase II, Xinghe Artificial Intelligence Industrial Park, No.333 Zhongkai 6th Road, Chenjiang Street, Zhongkai High-tech Zone, Huizhou

