

## Product Datasheet

# 240W/48V Industrial DIN Rail Power Supply

(GWS-P3000-DP240-48)



## OVERVIEW

GWS-P3000-DP240-48 is an economical 240W DIN rail power supply that conforms to German industrial standards. It is suitable for installation on TS-35/7.5, or TS-35/15 rails, using 90VAC to 264VAC input, and complies with EN61000-3-2 Standard on Harmonic Current Specifications Specified by the European Union.

GWS-P3000-DP240-48 adopts a metal shell design to improve heat dissipation consumption. The working efficiency is as high as 90%, and the product can work in an ambient temperature of -40 degrees to 70 degrees under the condition of air circulation. It has a constant current mode overload protection function, suitable for a variety of inductive or capacitive load applications, complete protection functions, and compliance with relevant certifications for industrial control equipment, making it a very competitive power supply solution for industrial applications.

## FEATURE

- Meet EMC Standard
- 100% full load aging test
- Power Input: AC90-264V
- Wide operation temperature range: -40°C-70°C
- High efficiency, long life time and high reliability
- Support production for short circuit/over current/over voltage

## APPLICATION

- Industrial Control System
- Semiconductor fabrication equipment
- Factory automation
- Electro-mechanical apparatus

## TECHNICAL SPECIFICATION


Model	GWS-P3000-DP240-48
<b>Output</b>	
Group of Output	1
DC Voltage	48VDC
Output Voltage Factory Setting	48.00-48.2VDC (Vin: 220Vac / Load: 0A)
Output Rated Current	5A
Output Current Range	0-5A
Rated Output Power	240W
Total Peak Output Power	360W (sustainable time 10S/220Vac)
Peak Output Current	7.5A (sustainable time 10S/220Vac)
Ripple Noise	Peak-to-peak value $\leq 100\text{mV}$ . (Measurement method: The terminal should be connected in parallel with 0.1uF and 47uF capacitors, and the

	measurement should be performed at a bandwidth of 20MHz)
Output Voltage Range	47-56VDC
Stabilized Voltage Precision	±1% (@ 90-264VAC input, 100% load)
Line Regulation	±0.5% (@ 90-264VAC input, 100% load)
Load Regulation	±1% (@90-264VAC input, 0-100% load)
Output Start Time	<2S @ nominal input (100% load )
Output Hold Time	>20ms @ 115VAC, >50 ms @ 230VAC (100% load )
Voltage Overshoot	≤5.0%
<b>Input</b>	
Input Voltage Range	90-264VAC
Input Rated Voltage Range	100-240VAC
Frequency Range	47Hz-63Hz
Rated Frequency	50Hz/60Hz
Starting Voltage	90VAC
Efficiency	>90.0% @115VAC, >91.0% @ 230VAC
Input Current	<4.40A @115VAC, <2.20 @ 230VAC
Start Inrush Current	<35A @ 115VAC& 230VAC
Power Factor	>0.99 @ 115VAC, >0.93 @ 230VAC
<b>Protection</b>	
Output Over Power	288-360W Swing machine (Testing method: Increase the output current until enabling the protection. Protection mode:Swing machine, Self-recovery after over-power released.)
Output Over Voltage	57-70V Swing machine (Short circuit the Pin1-2 of U8, swing machine. Output recovery to normal after removing the short circuit) Note: Do not use external voltage.
Output Over Current	6-7.5A Swing machine (Testing method: Increase the output current until

	enabling the protection. Protection mode: Swing machine, Self-recovery after over-current released.)
Output Short Circuit	Use a copper wire with a sufficient cross-sectional area and a length of 15cm±5cm to directly short-circuit at the power output port, which can be short-circuited for a long time, and can be automatically restored after the short-circuit is eliminated.
<b>Operation Environment</b>	
Operation TEMP / Humidity	-40°C-70°C, 20%-95%RH No condensing
Storage TEMP / Humidity	-40°C-85°C, 10%-95%RH No condensing
Temperature Coefficient	±0.03%/°C (0-50°C)
Vibration	Frequency range 10-500Hz, acceleration 2G, each sweep cycle 10min. 6 sweep cycles along the X, Y, and Z axes
Impact	Acceleration 20G, duration 11ms, 3 shocks along X, Y, and Z axis each
Altitude	2000m
<b>Safety and Electromagnetic Compatibility Standard</b>	
Security Standard	GB4943/EN62368-1 <input checked="" type="checkbox"/> Reference <input type="checkbox"/> Certification
Dielectric Strength	Input—Output: 3KVAC/10mA, Input--Case:1.5KVAC/10mA Output---Case: 0.5KVDC/10mA , Time for each testing is 1min.
Ground Test	Test conditions: 32A/2 minutes, Ground impedance: <0.1 ohms.
leakage Current	Input to ground ≤3.5mA, Input to output ≤0.25mA (Input 264VAC, Frequency 63Hz)
Insulation Resistance	Input-Output: 10M ohms
Conducted Disturbance	EN55022, EN55024, FCC PART 15 Class B
Radiated Interference	EN55022, EN55024, FCC PART 15 Class B
Harmonic Current	EN61000-3-2 Class D
Conducted Disturbance	EN61000-4-6 Level 3

Radiation Harassment	EN61000-4-3 Level 3 Class B
Power Frequency Harassment	EN61000-4-8 Level 3
Static Harassment	EN61000-4-2 Level 4 Class B
fast Burst	EN61000-4-4 Level 4 Class B
Lightning Strike (Surge)	EN61000-4-5 Level 4 Class B
interrupted Fall	EN61000-4-11
<b>Others</b>	
Dimension	131*121*45mm
Warranty	5 years

## DIMENSION

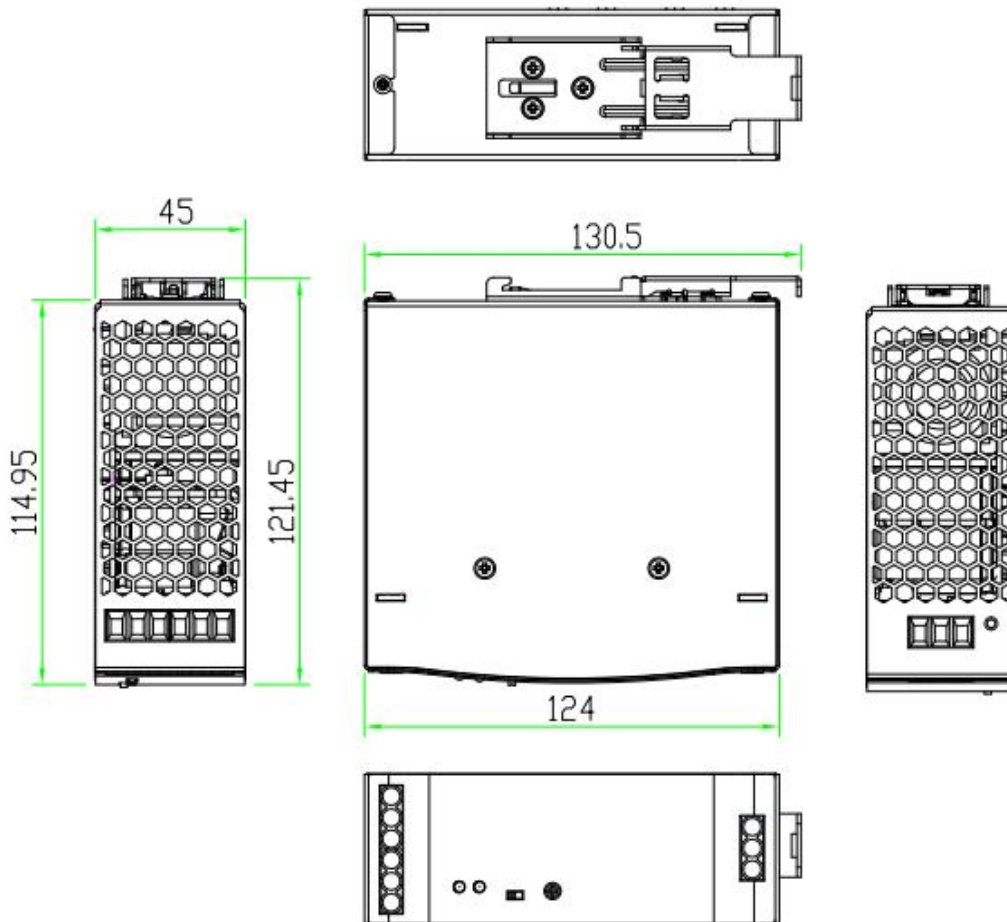



## CONTACT US

Tel: 0086-755-33376606

Fax: 0086-755-33376608

WeChat: HZGWS-PoE

Email: [hzgws@hzgws.com](mailto:hzgws@hzgws.com)

Skype: [hzgws@hzgws.com](https://www.skype.com/people/hzgws@hzgws.com)

Website: [www.hzgws.com](http://www.hzgws.com)

Address: Area C, 2nd Floor, Factory Building, No. 21, Huanqiao South Road, Chenjiang Street,  
Zhongkai High-tech Zone, Huicheng District, Huizhou

